

Lighted Marquee Install Guide

The following procedure should only take between 10-15 minutes.

Equipment Included:

- Lighted Marquee (1)
- Marquee Bracket (2)

Tools Required:

- Phillips Screwdriver
- Standard Screwdriver



Installing the Lighted Marquee

Installation Procedure

- 1 Use a Phillips screwdriver and the existing screws on the back of the stand to attach the marquee brackets to the stand: One bracket on each side.




- 2 Slide the marquee into place between the U clamps on the brackets.
- 3 Turn OFF all power to the machine.
- 4 Detach the fuse from the 12V power extension cord.



- 5 Feed the 4-pin connector on the power extension cord through the opening on one of the Showpiece cabinet stand supports.



- 6 Lead the power extension cord from the bottom of the support and reattach the fuse.
- 7 Using a standard screwdriver remove the backing plate from the rear of the cabinet.
- 8 Feed the lead wire through the opening where the plate was attached and plug in the 4-point connector to the Nighthawk System Box. See circled image below:

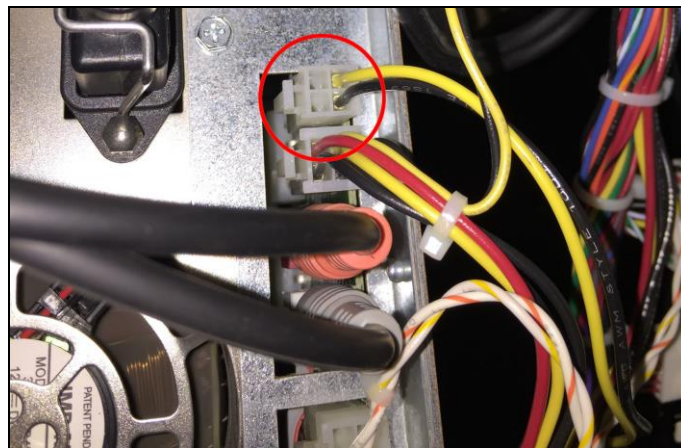

- 9 Turn power to the cabinet back ON. The sign illuminates automatically when power resumes to the cabinet.

WARNING

The Marquee Mounting System may not be compatible with all monitors and mounting devices. Make sure all pieces align correctly and that the fasteners are firmly attached to the monitor and stand before use. In some cases, extended mounting bolts may be required: Ensure that all bolts pass through all components, and they are firmly attached to their receiving component. Do not use the Marquee Mounting System if you cannot ensure its safe and correct installation with your monitor and mounting device. Failure to correctly install the Marquee Mounting System may result in damage or injury.